
180R-101849
 REV.: 9


 REV. DESCRIPTION
 DATE
 BY




	TYPE AMSR-3E SEISMICALLY RESTRAINED SPRING VIBRATION ISOLATORS						
	MODEL	RATED LOAD ² (LBS)	DEFLECTION (IN)	SPRING RATE (LB/IN)	COLOR CODE	ALLOWABLE G RATING 1	
	NODEL					HORIZONTAL	VERTICAL
AMS	SR-3E-1600	1600	3.00	533	DK GRAY	1.3	7.8
AMS	SR-3E-2110	2110	2.53	833	DK YELLOW	1.0	5.9
AMS	SR-3E-2440	2440	2.44	1000	RED	0.9	5.1
	R-3E-3500	3500	2.63	1333	GREEN	0.6	3.5

TABLE NOTES:

- 1. ALL ALLOWABLE G RATINGS ARE BASED ON HILTI KWIKBOLT TZ WEDGE ANCHORS (OR EQUAL) IN STONE AND AGGREGATE CONCRETE (Fc=3000 PSI).
- 2. RATED LOAD OF ISOLATOR IS STAMPED ON SPRING ASSEMBLY BASE PLATE.

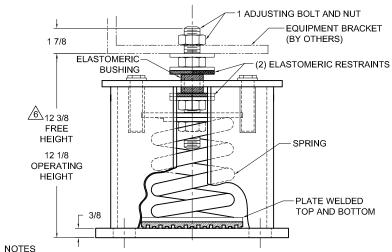



ISOLATOR SELECTIONS			
LOC 1:	LOC 2:		
LOC 3:	LOC 4:		
LOC 5:	LOC 6:		
LOC 7:	LOC 8:		
CUSTOMER EQP'T. TAG:			

NOTE: MATERIAL SHOWN IS FOR (1) SET.

- 1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y-14.
- 2. FINISH: HOUSING- ONE COAT BLACK PAINT, SPRING- BLACK PAINT, HARDWARE- ZINC ELECTROPLATE.
- 3. ALL SPRINGS DESIGNED WITH 50% OVER-TRAVEL.
- 4. REFER TO TABLE ABOVE FOR ALLOWABLE HORIZONTAL AND VERTICAL G RATINGS. SEE TABLE NOTE 1.
- 5. ISOLATOR HAS BEEN FACTORY PRE-COMPRESSED A NOMINAL 1/2 INCHES.

PRIOR TO MOUNTING EQUIPMENT, THE INTERNAL VERTICAL RESTRAINT WILL BE AGAINST THE HOUSING TOP PLATE AND THE ADJUSTING NUT WILL BE 1/4" ABOVE THE BLOCK AT THE "FREE HEIGHT." WHEN THE EQUIPMENT IS MOUNTED, THE SPRING WILL DEPRESS AND REST ON THE SHIM AT THE "OPERATING HEIGHT."

7. RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL. HIGHER DEFLECTIONS ARE ALLOWED IF THEY MEET SPECIFICATIONS.


OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR: JOB NAME:	MODEL AMSR-3E 1600-3500 LBS.		NONE SHEET:	Memb	_
CUSTOMER:	SEISMIC ISOLATORS			7134	
CUSTOMER P.O.:	3 INCH DEFLECTION	THE VMC GROUP The Power of Together			REVISIO
SALES ORDER:		Bloomingdale, NJ 07403 Houston, TX 77041			

180R-101849 REV.: 9 REV. DESCRIPTION DATE BY

READ INSTRUCTIONS IN THEIR ENTIRETY BEFORE BEGINNING.

- 1. ISOLATORS ARE SHIPPED FULLY ASSEMBLED AND ARE TO BE SPACED AND ARRANGED IN ACCORDANCE WITH INSTALLATION DRAWINGS OR AS OTHERWISE RECOMMENDED.
- 2. SET ISOLATORS ON FLOOR OR SUB-BASE, ENSURING THAT ALL ISOLATOR CENTERLINES MATCH THE EQUIPMENT MOUNTING HOLES OR SPACE AND ARRANGE ISOLATORS IN ACCORDANCE WITH THE INSTALLATION DRAWING. SHIM OR GROUT AS REQUIRED LEVELING ALL ISOLATOR BASE PLATES AT THE SAME ELEVATION (1/4" MAXIMUM DIFFERENCE IN ELEVATION CAN BE TOLERATED). ISOLATOR BASE MUST REST ON A FLAT SURFACE.
- 3. ANCHOR DOWN ISOLATOR'S USING BASE PLATE THRU HOLES "H".
- 4. REMOVE EQUIPMENT ATTACHMENT NUT "B" ON ISOLATOR STUD "C" AND PLACE EQUIPMENT ON ISOLATOR'S WASHER "F". THE EQUIPMENT WEIGHT WILL COMPRESS THE SPRING INSIDE THE HOUSING.
- 5. TURN THE ADJUSTING NUT "D" UNDER THE WASHER COUNTER-CLOCKWISE TO COMPRESS THE SPRING. WHEN THE LOAD IS EQUALIZED, TURNING THE NUT WILL RAISE THE EQUIPMENT UNTIL THE INTERNAL GAP "G-1" IS APPROXIMATELY EQUAL TO THE EXTERNAL GAP "G-2". (I.E. THE EQUIPMENT CAN MOVE UP OR DOWN, THE SAME DISTANCE IN A SEISMIC EVENT).
- 6. THE ADJUSTING PROCESS SHOULD BE DONE GRADUALLY ON ALL ISOLATORS.
- 7. REPLACE ISOLATOR ATTACHMENT NUTS "B" ON ADJUSTING BOLTS "C" TO SECURE MACHINE LEGS TO ISOLATORS. HAND TIGHTEN WHERE THERE IS FIRM CONTACT BETWEEN THE NUT AND EQUIPMENT. (HAND TOOLS MAY BE USED.) THEN TIGHTEN THE NUT AN ADDITIONAL 1/3 TURN.

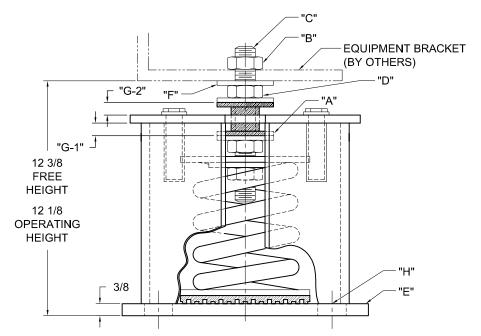

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH FOLIAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:		
JOB NAME:		
CUSTOMER :		
CUSTOMER P.O.:		
SALES ORDER		

MODEL AMSR-3E 1600-3500 LBS. SEISMIC ISOLATORS 3 INCH DEFLECTION

_	E VMC GROUP Power of Together

NONE

SHEET:



Bloomingdale, NJ 07403 Houston, TX 77041

DRAWING NO.:

REVISION