


REV.	DESCRIPTION	DATE	BY

MODEL M6SH-1E 6-SPRING SEISMIC ISOLATORS FOR NOMINAL 1" DEFLECTION

MODEL	RATED LOAD (LBS)	RATED DEFLECTION (IN)	SPRING RATE (LB/IN)	SPRING COLOR CODE
M6SH-1E-6000	6000	1.00	6000	TAN
M6SH-1E-7200N <sup>1</sup>	7200	1.04	6924	TAN/ DK BLUE
M6SH-1E-8400	8400	1.00	8400	PINK
M6SH-1E-10200N <sup>1</sup>	10200	1.10	9270	PINK/ DK BLUE
M6SH-1E-12000	12000	1.11	10812	WHITE
M6SH-1E-13980N <sup>1</sup>	13980	1.11	12600	WHITE/ RED
M6SH-1E-15450N <sup>1</sup>	15450	1.11	13920	WHITE/DK PURPLE
M6SH-1E-17940N <sup>1</sup>	17940	1.11	16164	WHITE/DK GREEN
M6SH-1E-19500N <sup>1</sup>	19500	1.04	18750	WHITE/GRAY

1. TWO NESTED SPRINGS YIELD THIS LOAD. THE COLOR CODE IS FOR OUTER SPRING/ INNER SPRING.

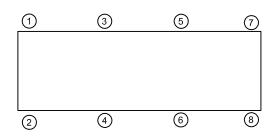

ISOLATOR SELECTIONS			
LOC 1:	LOC 2:		
LOC 3:	LOC 4:		
LOC 5:	LOC 6:		
LOC 7:	LOC 8:		
CUSTOMER EQP'T. TAG:			

NOTE: MATERIAL SHOWN IS FOR (1) SET.

## NOTES:

FREE AND

OPERATING

HEIGHT

- 1. STANDARD ISOLATOR FINISH: CASTING AND WELDMENTS- ONE COAT BLACK PAINT, SPRINGS-POWDER COAT, HARDWARE-ZINC ELECTROPLATE.
- 2. EST. UNIT WEIGHT: 265 LBS.
- 3. STATIC LOAD RATINGS ON SHEET 2 OF 2 ARE FOR GUIDANCE ONLY. VALUES ARE BASED ON TESTS OR CALCULATIONS WITH BASE PLATES BOLTED TO STEEL. FOR ATTACHMENT TO CONCRETE, CONSULT FACTORY.
- 4. RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL. HIGHER DEFLECTIONS ARE ALLOWED IF THEY MEET SPECIFICATIONS.

ELASTOMERIC CUP

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:		
JOB NAME:		
CUSTOMER :		
CUSTOMER P.O.:		
CALEC OPPED.		

MODEL M6SH-1E 6000-19500 LBS. **VIBRATION ISOLATOR SEISMIC RESTRAINT 1 INCH DEFLECTION** 

3/4 LIMIT STOP

(NOT SHOWN

IN TOP VIEW

FOR CLARITY)

	NONE SHEET:	Member	
THE VMC GROUP The Power of Together Bloomingdale, NJ 07403 Houston, TX 77041	DRAWING NO.:		REVISION

179R—101838 REV.: 5 REV. DESCRIPTION DATE BY


INSTALLATION AND ADJUSTMENT INSTRUCTIONS

1. ISOLATORS ARE SHIPPED FULLY ASSEMBLED AND ARE TO BE SPACED AND LOCATED IN ACCORDANCE

- ISOLATORS ARE SHIPPED FULLY ASSEMBLED AND ARE TO BE SPACED AND LOCATED IN ACCORDANCE WITH INSTALLATION DRAWINGS OR AS OTHERWISE RECOMMENDED.
- 2. LOCATE ISOLATORS ON A LEVEL FLOOR OR SUB-BASE, ENSURING THAT ALL ISOLATOR CENTERLINES MATCH THE EQUIPMENT MOUNTING HOLES. SHIM OR GROUT AS REQUIRED TO LEVEL ALL ISOLATOR BASE PLATES. A 1/4" MAXIMUM DIFFERENCE IN ELEVATION CAN BE TOLERATED.
- 3. ANCHOR ALL ISOLATORS TO THE FLOOR OR SUB-BASE AS RECOMMENDED.
- 4. GENTLY PLACE MACHINE OR EQUIPMENT ONTO TOP PLATE OF ISOLATOR BOLT EQUIPMENT OR SUB BASE SECURELY TO ISOLATOR USING MINIMUM ASTM A325 (SAE GR. 5) HIGH STRENGTH BOLTS. BOLTS SHOULD NOT PROTRUDE MORE THAN 1/8" BELOW THE TOP PLATE.
- 5. THE EQUIPMENT WEIGHT WILL CAUSE THE SPRING AND THUS THE TOP PLATE TO DESCEND AND REST ON THE UPPER BUMPER PADS.
- 6. BACK-OFF ON THE TWO (2) SIDE LIMIT STOP LOCKNUTS, SO THAT THEY DO NOT HAMPER THE ADJUSTMENT PROCESS.
- 7. ADJUST EACH AND EVERY ISOLATOR IN SEQUENCE, ONE FULL CLOCKWISE TURN AT A TIME. REPEAT THIS PROCEDURE UNTIL THE 1/4" OPERATING CLEARANCE IS OBTAINED. NOTE: BE SURE LIMIT STOP NUTS CONTINUE TO SHOW CLEARANCE.
- 8. CHECK EQUIPMENT LEVEL AND FINE ADJUST ISOLATORS AS NECESSARY TO OBTAIN EQUIPMENT LEVEL.
- 9. ADJUST ALL LIMIT STOP NUTS TO OBTAIN A 1/4" MAXIMUM CLEARANCE.
- 10. ADJUSTMENT IS COMPLETE.

## RATED LOAD CURVES

- 1. TO USE THE RATED LOAD CURVES:
  - A. CALCULATE VERTICAL AND HORIZONTAL FORCES ACTING ON MOUNTINGS, INCLUDING TRANSLATIONS AND OVERTURNING MOMENTS.
  - B. THE INTERSECTION OF THE HORIZONTAL LOAD AND VERTICAL LOAD MUST FALL WITHIN THE CURVE FOR THE SPECIFIED PART.
- 3. THE RATED LOAD CURVES ASSUME ONE OF THE FOLLOWING METHODS OF TIE-DOWN AT EACH BOLT LOCATION:
  - A. FOUR (4) 3/4" DIA. HILTI "KWIK-BOLT II" WEDGE ANCHORS, WITH MINIMUM 4 3/4" EMBEDMENT INTO 3000 PSI CONCRETE. MINIMUM EDGE DISTANCE IS 9 3/4". (NOTE: OTHER BRANDS OF ANCHOR BOLTS MAY BE USED, PROVIDED THEY ARE OF EQUAL STRENGTH AND HAVE A CURRENT ICBO REPORT).
    - TO ACHIEVE RATED LOAD, "SPECIAL INSPECTION" IS REQUIRED ON ALL CONCRETE ANCHOR INSTALLATIONS, AS DESCRIBED BELOW:
    - a) 50% OR ALTERNATE BOLTS IN A GROUP SHALL BE TENSION TESTED TO 6200 LBS TENSION.
    - b) TESTING SHOULD OCCUR 24 HOURS MINIMUM AFTER INSTALLATION OF ANCHORS.
    - c) IF ANY ANCHOR FAILS TESTING, TEST ALL ANCHORS UNTIL TWENTY (20) CONSECUTIVE ANCHORS PASS, THEN RESUME THE INITIAL TESTING FREQUENCY.
  - B. FOUR (4) 3/4" DIA. BOLTS PER ASTM A307 OR BETTER.
- 4. THE SUPPORT STRUCTURE (BY OTHERS) IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD AND SHALL BE DESIGNED TO ADEQUATELY SUPPORT THE WEIGHTS AND FORCES SHOWN.

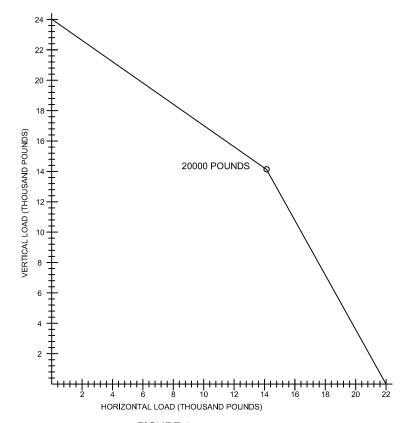

\_ FIGURE 1\_ SEISMIC RATINGS (ATTACHMENT TO CONCRETE)

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR			SCALE:	
CERTIFIED FOR:			NONE	b-
JOB NAME:	MODEL M6SH-1E 6000-19500 LBS.		SHEET:	Membe.
			SHEET:	, Alsemi
CUSTOMER:	VIBRATION ISOLATOR SEISMIC			
CUSTOMER P.O.:	RESTRAINT 1 INCH DEFLECTION	THE VMC GROUP	DRAWING NO.:	REVISION
		The Power of Together Bloomingdale, NJ 07403		
SALES ORDER:		Houston, TX 77041		