



## TYPE RBS2 ELASTOMERIC RING &amp; BUSHING NITRILE

PART NO.	MODEL NO.	AXIAL STAIC LOAD MAX.	RADIAL STATIC LOAD MAX LBS.	DUROMETER	COLOR CODE	MATERIAL
RBS2-350Ni	RBS2-350			55	RED	NITRILE

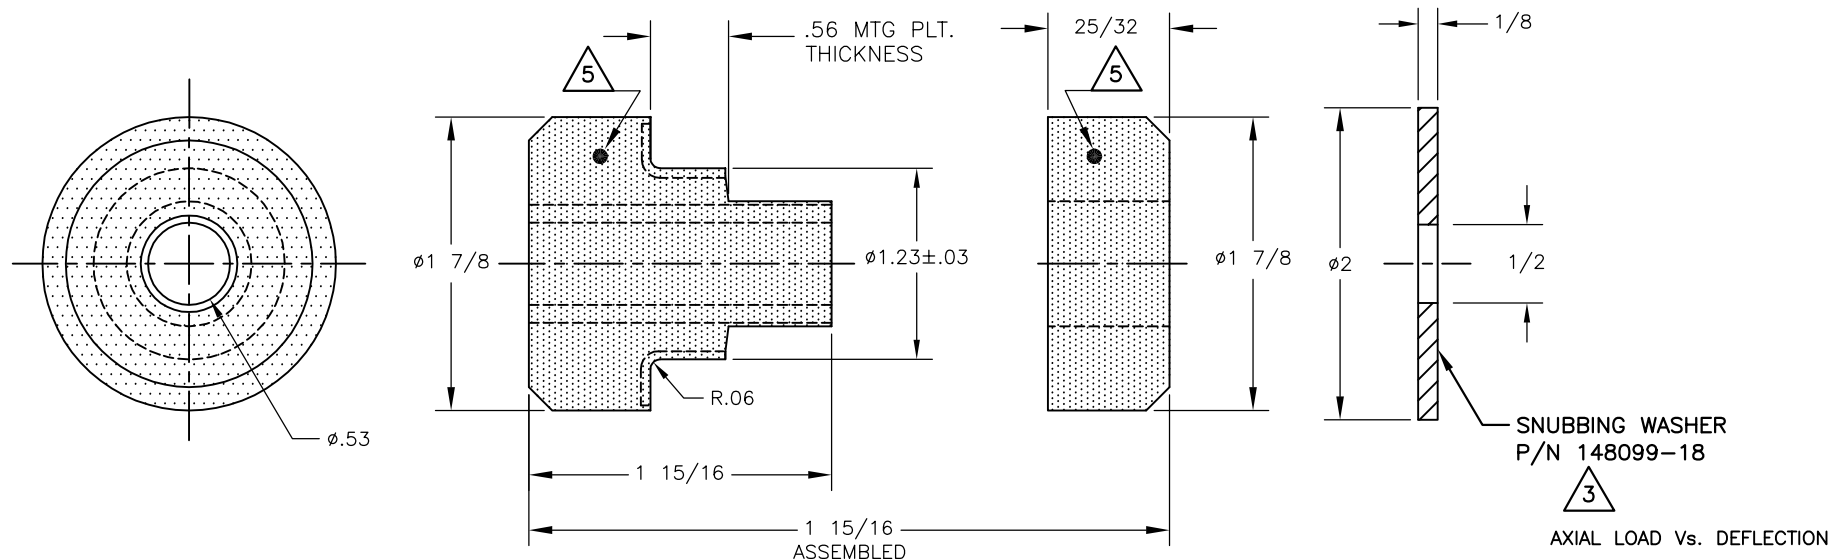

## NOTES:

- ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
- ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY .
- SNUBBING WASHER IS OPTIONAL, ORDER SEPERATE ON PURCHASE ORDER .
- FINISH :YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED .
- COLOR-CODE "MARK "IS AN ACCEPTABLE ADDITION TO MODEL STAMPING .
- STAMPING SURFACE LOCATION AS MARKED ON DRAWING .
- CURRENTLY UNDER ENGINEERING REVIEW CONTACT VMC FOR AVAILABILITY

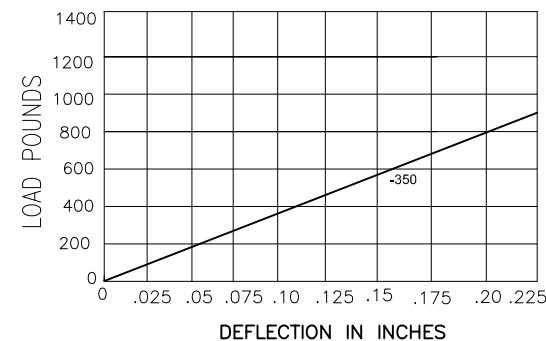

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

## CERTIFIED FOR:

JOB NAME: \_\_\_\_\_

CUSTOMER : \_\_\_\_\_

CUSTOMER P.O.: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

MODEL RBS2  
RING AND BUSHING  
NITRILE  
ELASTOMERIC ISOLATOR  
WITH WEAR PLATE



**THE VMC GROUP**  
The Power of Together  
Bloomington, NJ 07403  
Houston, TX 77041

SCALE :

NONE

SHEET:

1 OF 1

DRAWING NO.:

REVISION

Member  
**VISCMA**