
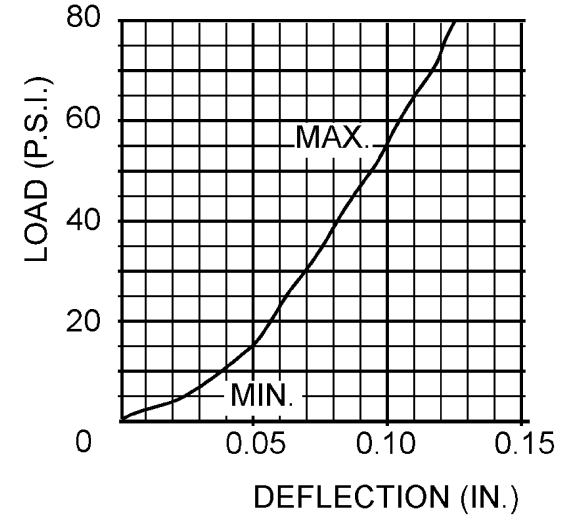


REV.	DESCRIPTION	DATE	BY

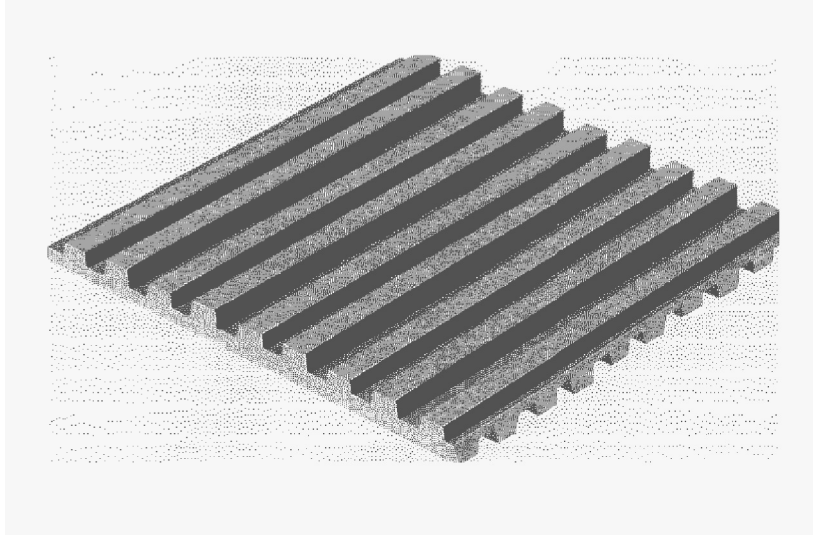

SPECIFICATIONS:

MATERIALS: RIBBED ELASTOMERIC PAD, ALTERNATE HIGH AND LOW RIBS, 3 PER INCH

THICKNESS: 3/8"

RECOMMENDED LOADING: 5-50 P.S.I.

DEFLECTION: 0.025" TO 0.095"

SIZE	LOAD RANGE
2 X 2	20 - 200
3 X 3	45 - 450
4 X 4	80 - 800
5 X 5	125 - 1250
6 X 6	180 - 1800
8 X 8	320 - 3200
9 X 9	405- 4050

NOTES:

- 1) AVAILABLE IN 18" X 36" SHEETS AND ALSO IN SMALLER SIZES CUT TO ORDER.
- 2) ALSO FURNISHED AS 1/4" THICK FLATBACK (RIBS ONE SIDE ONLY.)

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL NR 20-4050 LBS.
ELASTOMERIC 0.375 INCH THICK
ISOLATION PAD**



THE VMC GROUP
The Power of Together
Bloomington, NJ 07403
Houston, TX 77041

SCALE :

NONE

SHEET:



DRAWING NO.:

REVISION