
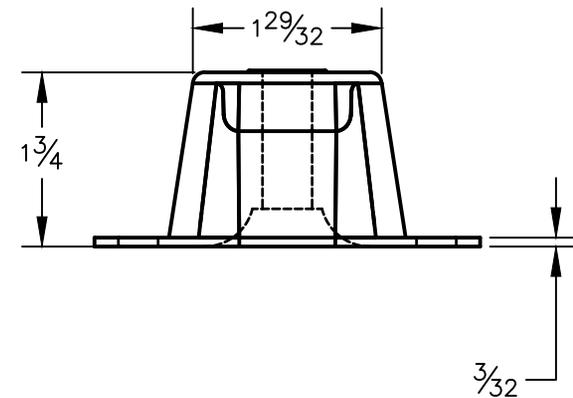
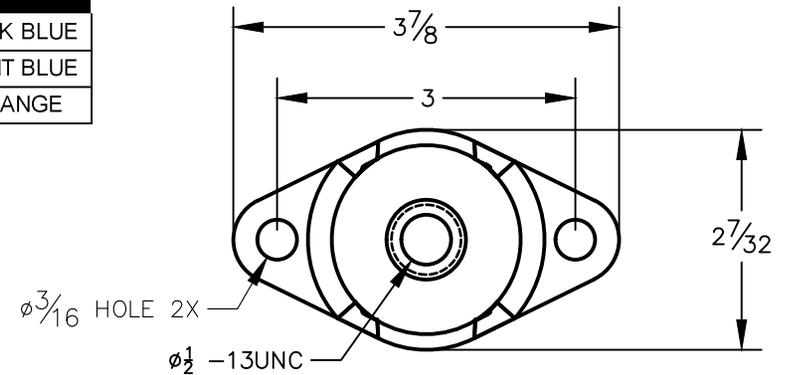


REV.	DESCRIPTION	DATE	BY

PART NUMBER	MODEL	RATED AXIAL LOAD (LBS.)	RATED RADIAL LOAD (LBS.)	DUROMETER	COLOR CODE
115A-100632-01	Mtg RDC2-175 EHT	175	80	40	DARK BLUE
115A-100632-03	Mtg RDC2-425 EHT	425	195	60	LIGHT BLUE
115A-100632-04	Mtg RDC2-550 EHT	550	250	70	ORANGE

TABLE 1

- MOUNTS PROVIDE A NOMINAL 9-12Hz AXIAL NATURAL FREQUENCY AT RATED AXIAL LOAD.
- MAXIMUM AXIAL DEFLECTION TO SOLID COMPRESSION, 0.38.



NOTES:

1. MOLDED STEEL AND ELASTOMER MOUNT FOR ALL-ATTITUDE, CAPTIVE, FAIL-SAFE USE IN AVERAGE COMMERCIAL AND INDUSTRIAL APPLICATIONS. CONSULT VMC FOR APPLICATION AND EXTREME ENVIRONMENT USE. OTHER LOAD RATINGS AVAILABLE.
2. ALL DIMENSIONS ARE FOR CUSTOMER REFERENCE ONLY. TABLE 1 IS AVERAGE DESIGN DATA FOR CUSTOMER REFERENCE.
3. MODEL COLORS ARE ACTUAL MOUNT COLOR.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER : \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL RDC2 EHT 175-550 LBS.  
 ELASTOMERIC RESTRAINED DOUBLE  
 DEFLECTION ISOLATOR**



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE :  
 NONE

SHEET:



DRAWING NO.: \_\_\_\_\_ REVISION