
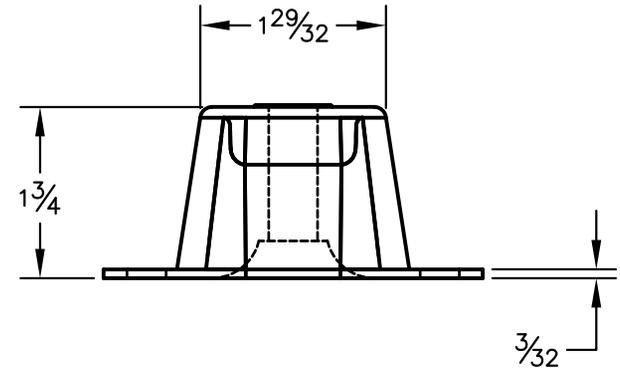
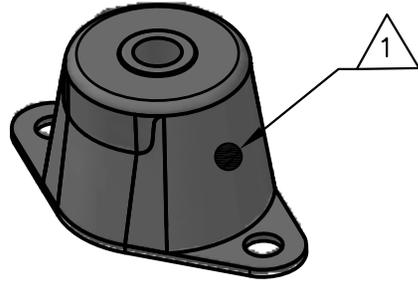


REV.	DESCRIPTION	DATE	BY

PART NUMBER	MODEL	RATED AXIAL LOAD (LBS.)	RATED RADIAL LOAD (LBS.)	DUROMETER	COLOR CODE
770112-01	RDC2-175	175	50	40	BLUE
770112-02	RDC2-300	300	85	56	WHITE
770112-03	RDC2-425	425	120	60	RED
770112-04	RDC2-550	550	160	70	GREEN
770112-05	RDC2-675	675	190	80	YELLOW

TABLE 1

- MOUNTS PROVIDE A NOMINAL 9-12Hz AXIAL NATURAL FREQUENCY AT RATED AXIAL LOAD.
- MAXIMUM AXIAL DEFLECTION TO SOLID COMPRESSION, 0.38.

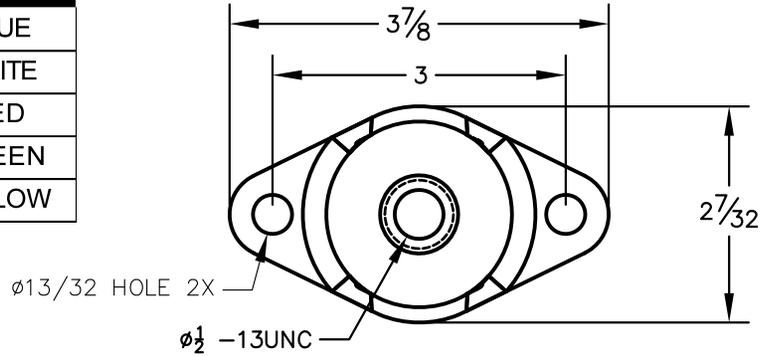

NOTES:

- 1 LOAD RATING CODE AND MODEL NUMBER STAMP.
2. MOLDED STEEL AND ELASTOMER MOUNT FOR ALL-ATTITUDE, CAPTIVE, FAIL-SAFE USE IN AVERAGE COMMERCIAL AND INDUSTRIAL APPLICATIONS. CONSULT VMC FOR APPLICATION AND EXTREME ENVIRONMENT USE. OTHER LOAD RATINGS AVAILABLE.
3. ALL DIMENSIONS ARE FOR CUSTOMER REFERENCE ONLY. TABLE 1 IS AVERAGE DESIGN DATA FOR CUSTOMER REFERENCE.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL RDC2 NEOPRENE 175-675 LBS.
 ELASTOMERIC RESTRAINED DOUBLE
 DEFLECTION ISOLATOR



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :

NONE

SHEET:

1 OF 1

DRAWING NO.:

REVISION

