




REV.	DESCRIPTION	DATE	BY

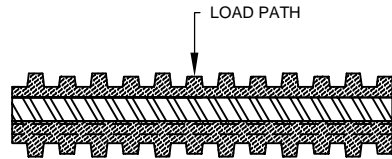


STYLE A - STEEL PLATE BONDED BETWEEN NR AND FLATBACK PADS

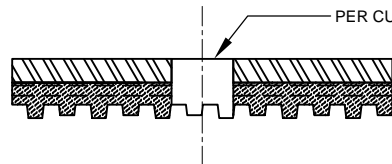


STYLE B - NR WITH LOAD PLATE AND HOLE

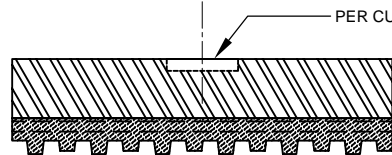

STYLE C - NR WITH LOAD PLATE AND COUNTER- BORED HOLE

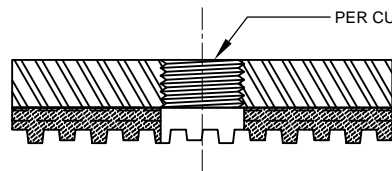

STYLE D - NR WITH LOAD PLATE AND TAPPED HOLE



STYLE E - GALVANIZED STEEL SHIM PLATE BONDED BETWEEN MULTIPLE NR PADS

SIZE	LENGTH (IN.)	WIDTH (IN.)	HEIGHT FOR STYLE (IN.)					LOAD RANGE
			A	B	C	D	E*	
22	2	2	7/8	5/8	3/4	3/4	13/16	20-200
33	3	3	7/8	5/8	3/4	3/4	13/16	45-450
44	4	4	7/8	5/8	3/4	3/4	13/16	80-800
55	5	5	7/8	5/8	7/8	7/8	13/16	125-1250
66	6	6	7/8	5/8	7/8	7/8	13/16	180-1800
88	8	8	1	3/4	1	1	13/16	320-3200
99	9	9	1	3/4	1	1	13/16	405-4050

\*THIS HEIGHT BASED ON TWO NR PADS. FOR EACH ADDITIONAL NR PAD COMBINED, ADD 7/16"

NOTES:

- 1) FINISH INDUSTRIAL GRADE ENAMEL (STYLE A THRU D).
- 2) CUSTOM SIZES AND HOLE LOCATIONS AVAILABLE UPON REQUEST.
- 3) PAD PATTERN MAY DIFFER.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_

CUSTOMER : \_\_\_\_\_


CUSTOMER P.O.: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

MODEL SP-NR 20-4050 LBS.  
ELASTOMERIC ISOLATION PAD BONDED  
TO STEEL PLATE STYLE A THRU E



**VMC GROUP**  
THE POWER OF TOGETHER™  
Bloomingdale, NJ 07403  
Houston, TX 77041

SCALE: NONE	
SHEET:	
DRAWING NO.:	REVISION