



REV.	DESCRIPTION	DATE	BY

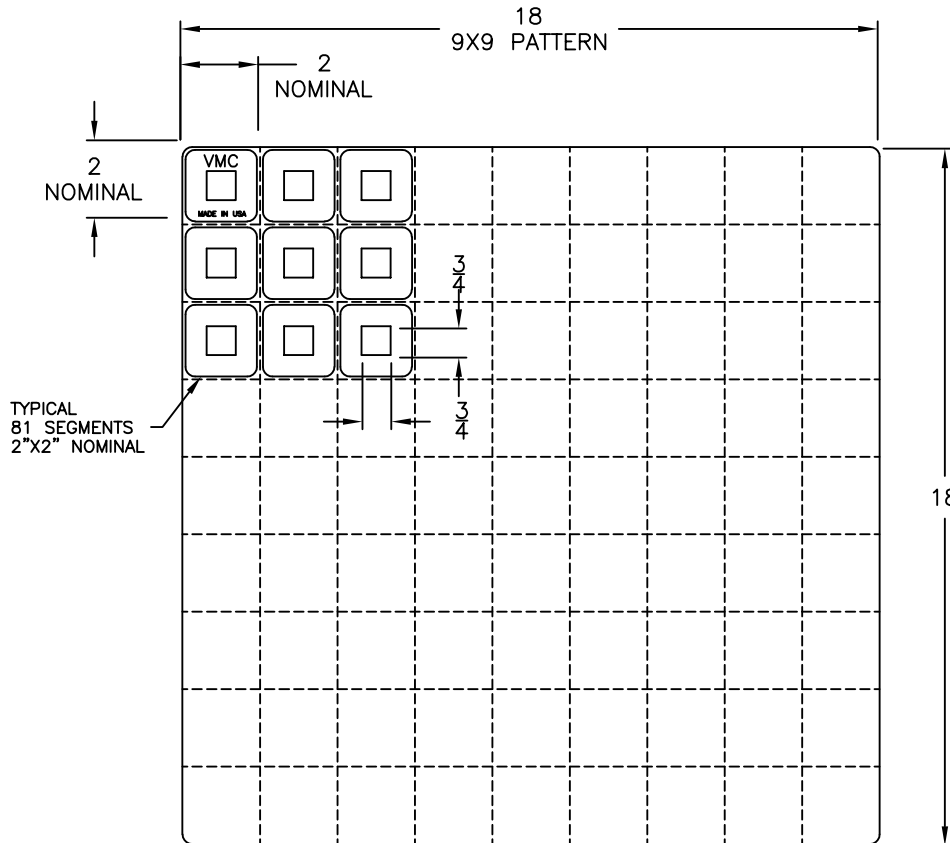

PART NUMBER	MODEL DESIGNATION	RATED COMPRESSIVE LOAD ON 2"X2" SEGMENT (LBS.)	COLOR CODE
119A-100348-01	MAXI-FLEX 40EHT	180	RED
119A-100348-02	MAXI-FLEX 50EHT	240	LIGHT BLUE
119A-100348-03	MAXI-FLEX 60EHT	360	ORANGE
119A-100348-04	MAXI-FLEX 65EHT		DARK BLUE

- NOTE:
1. RATED LOAD PROVIDES 15% (0.11 INCH) DEFLECTION.
 2. FOR INCREASED DEFLECTION, MAXI-FLEX CAN BE STACKED WITH 16 GAUGE SHIMS SEPARATING THE LAYERS.

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
 2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 3. MOLDED ELASTOMER PAD, SECTIONABLE BY CUSTOMER.
 4. HIGH TEMPERATURE LIMIT 450 DEGREES FAHRENHEIT UNDER MOST CONDITIONS.
 5. NOT FOR USE IN AN OIL-SATURATED ENVIRONMENT.
 6. ADDITIONAL ELASTOMER TYPES & CAPACITIES AVAILABLE, CONTACT THE VMC GROUP FOR APPLICABILITY.
- CURRENTLY UNDER ENGINEERING REVIEW CONTACT VMC FOR AVAILABILITY..

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:


JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL MAXI-FLEX 180-360 LBS.
EXTREME HIGH TEMPERATURE
2 SQUARE INCH ELASTOMERIC PAD**



SCALE: NONE	
SHEET:	
DRAWING NO.:	REVISION