




REV.	DESCRIPTION	DATE	BY

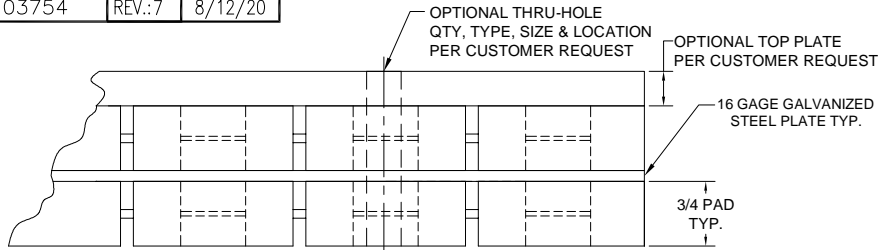

2 LAYERS COMBINATION OPTIONS

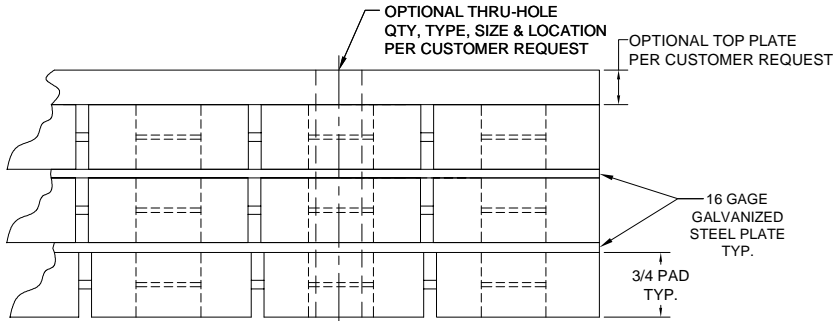

3 LAYERS COMBINATION OPTIONS

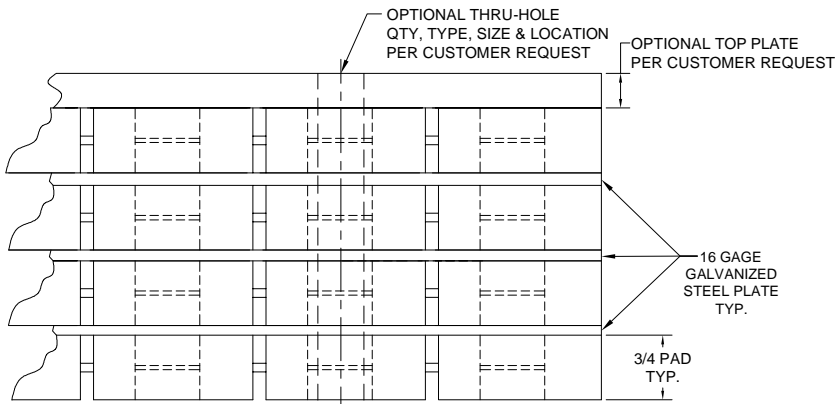


4 LAYERS COMBINATION OPTIONS

COLOR CODE	RECOMMENDED LOAD RATINGS PER 2"X 2" SEGMENT, (LBS.)
BLUE	120
BLACK (STANDARD)	180
RED	240
GREEN	360

NOTE:
FOR INCREASED DEFLECTION, MAXI-FLEX PADS CAN BE STACKED WITH 16 GAUGE SHIMS SEPARATING EACH LAYER.

LOAD VS. DEFLECTION PER 2 INCH SEGMENT

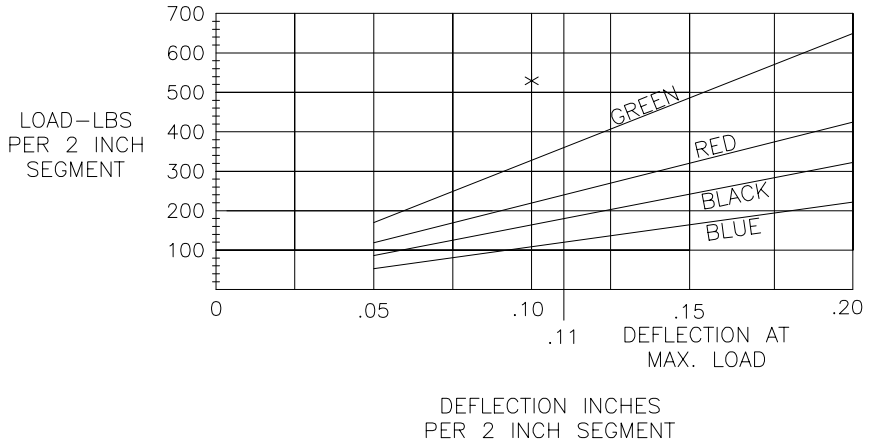

NOTE:
1. SPECIAL FLEX-PLATE SIZES, COMBINATIONS AND CAPACITIES AVAILABLE UPON REQUEST. CONTACT VMC FOR AVAILABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL MULTI-LAYER MAXI-FLEX
120-360 LBS.
ELASTOMERIC PAD**

VMC GROUP
THE POWER OF TOGETHER®
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE: NONE

SHEET: _____

DRAWING NO.: _____

REVISION: _____