




REV.	DESCRIPTION	DATE	BY

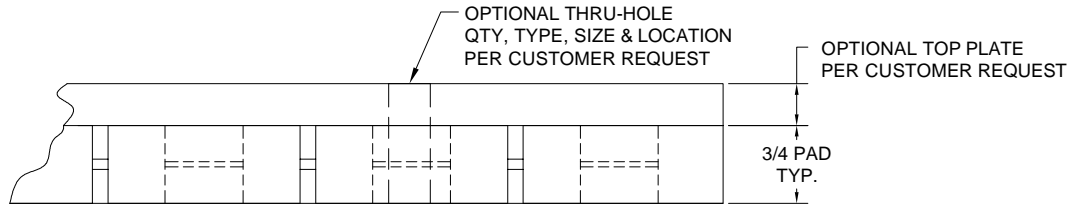

**PAD & PLATE COMBINATION WITH ONE CTR. HOLE OPTION**

COLOR CODE	RECOMMENDED LOAD RATINGS PER 2"X 2" SEGMENT, (LBS.)
BLUE	120
BLACK (STANDARD)	180
RED	240
GREEN	360

**LOAD VS. DEFLECTION PER 2 INCH SEGMENT**

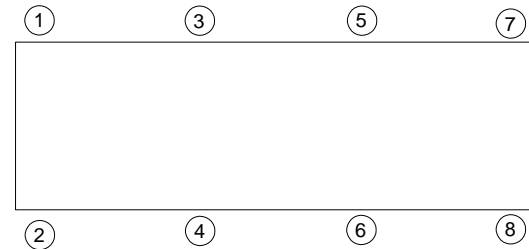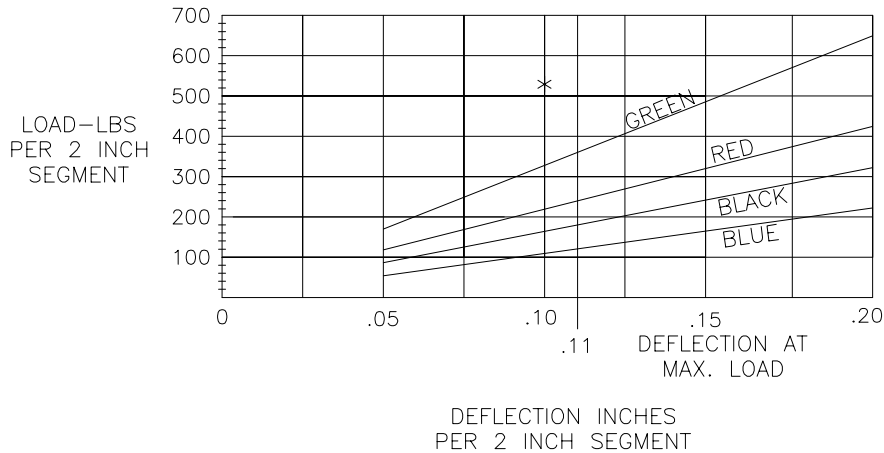

ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQPT. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

NOTE: 1. SPECIAL FLEX-PLATE SIZES, COMBINATIONS AND CAPACITIES AVAILABLE UPON REQUEST. CONTACT VMC FOR AVAILABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O.: \_\_\_\_\_

SALES ORDER: \_\_\_\_\_

**MODEL SINGLE LAYER MAXI-FLEX  
PAD & PLATE 120-360 LBS.  
ELASTOMERIC PAD**

**VMC GROUP**  
THE POWER OF TOGETHER™  
Bloomington, NJ 07403  
Houston, TX 77041

SCALE:	NONE	
SHEET:	1 OF 1	
DRAWING NO.:		REVISION