


REV.	DESCRIPTION	DATE	BY

CA4 SERIES

1/8" WIRE ROPE

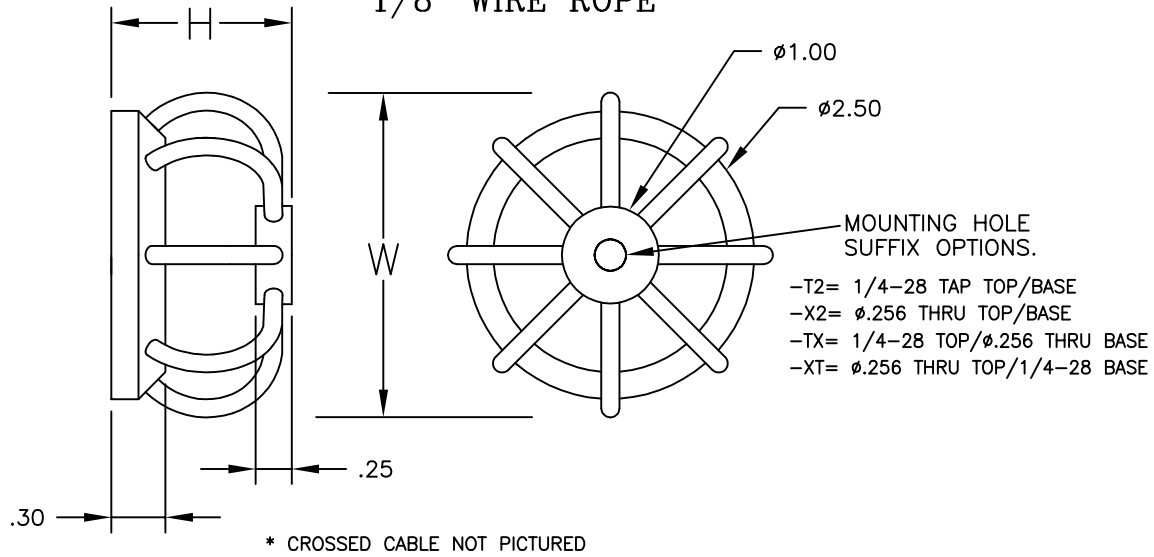

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H \pm .06	W(REF)				
CA4-200-08-[]	1.25	2.75	COMPRESSION SHEAR 45 DEG. C/R	175 105 80	340 95 175	.30 .30 .50
CA4-250-08-[]	1.70	3.00	COMPRESSION SHEAR 45 DEG. C/R	70 40 30	140 35 85	.45 .50 .80
CA4-300-08-[]	2.00	3.25	COMPRESSION SHEAR 45 DEG. C/R	40 10 15	85 20 50	.60 .75 .72
CAX4-[] (CROSSED CABLE)	1.70	3.25	COMPRESSION SHEAR 45 DEG. C/R	45 45 20	110 35 70	.55 .45 .90

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL CA4 SERIES
CIRCULAR WIRE ROPE
ISOLATOR**



THE VMC GROUP
The Power of Together
Bloomington, NJ 07403
Houston, TX 77041

SCALE:
NONE

SHEET: _____



DRAWING NO.: _____

REVISION: _____