


MODEL #	NOMINAL DIMENSIONS			LOAD MODE	SHOCK	VIBRATION	RATED
	H	W1(REF)	W2(REF)		AVERAGE	AVERAGE	DYNAMIC
					Klbs./in.	Klbs./in.	TRAVEL in.
JSQ2-044-T2	0.44	0.70	0.92	Compression	45	55	0.19
				Shear	25	25	0.19
				45 deg. C/R	30	40	0.27
JSQ2-050-T2	0.50	0.78	1.03	Compression	30	40	0.25
				Shear	20	15	0.25
				45 deg. C/R	15	25	0.35
JSQ2-062-T2	0.62	0.84	1.10	Compression	15	25	0.37
				Shear	10	10	0.37
				45 deg. C/R	10	15	0.52

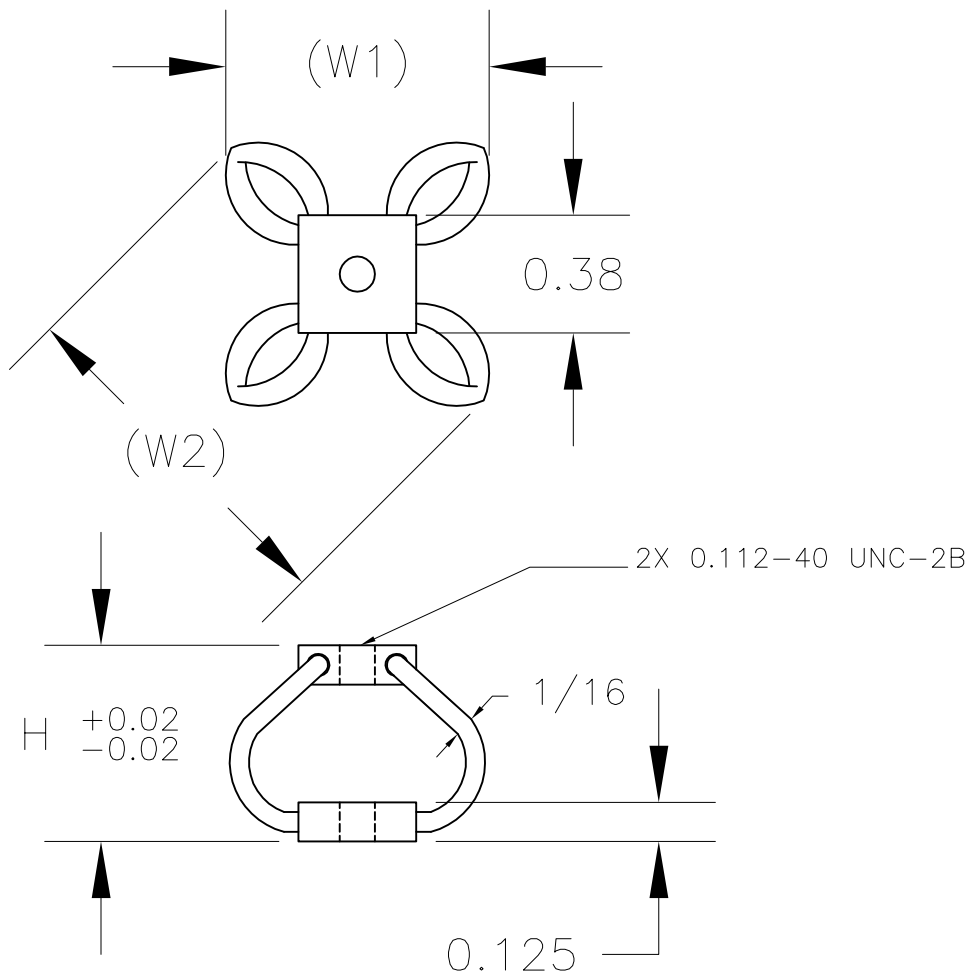

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL JSQ2 SERIES  
 SQUARE WIRE ROPE  
 ISOLATOR**



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION