


204R-103368 REV.: 3


REV.	DESCRIPTION	DATE	BY

MODEL NO.	MAX. UNIFORM LOAD	DEFL. AT MAX. LOAD	VERT. DYNAMIC FREQ. AT MAX. LOAD
MWIP1	13000 LBS	.10 in	12 HZ

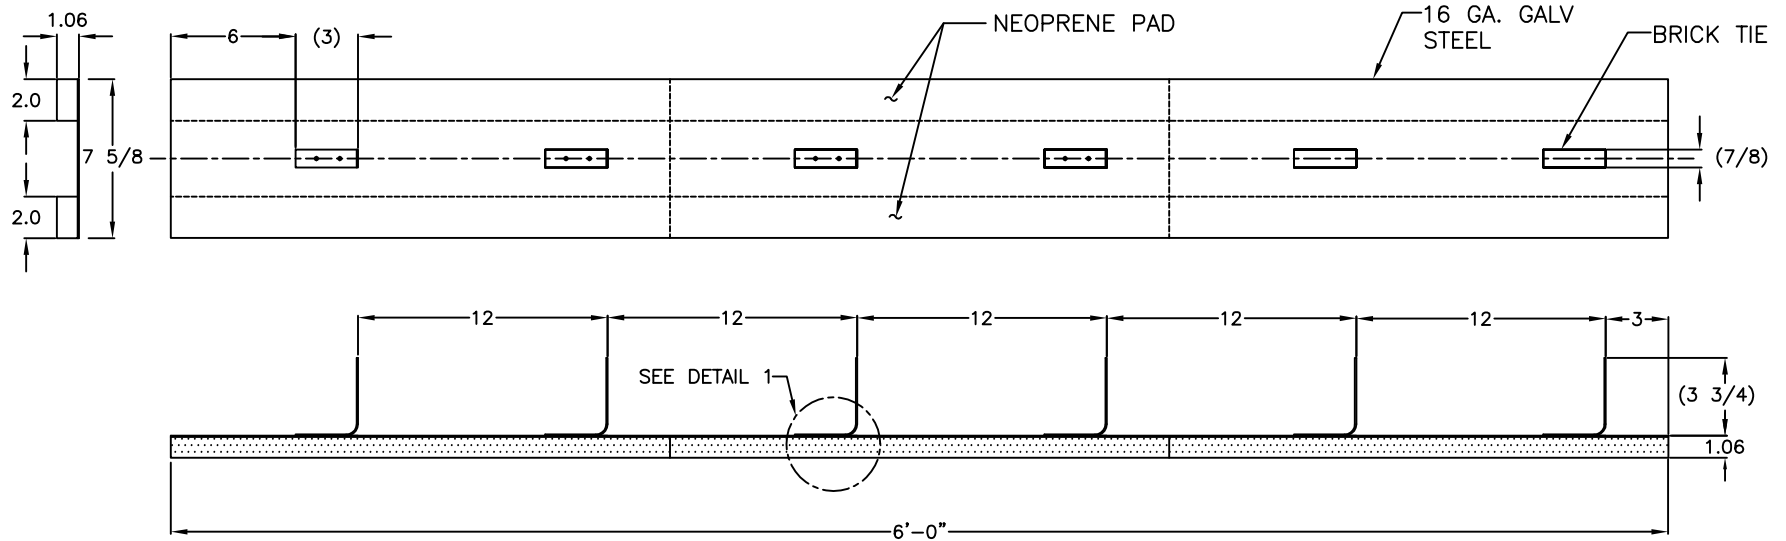

NOTES:

1. ALL DIMENSIONS IN INCHES. INTERPRET PER ANSI Y14.
2. MATERIALS: ELASTOMER-BRIDGE BEARING NEOPRENE SHEET METAL AND BRICK TIES-GALVANIZED STEEL

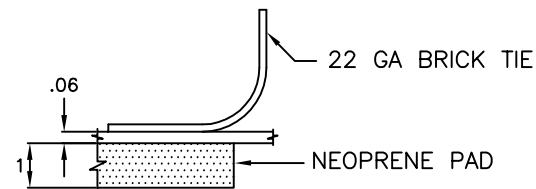

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL MWIP1 13000 LBS. MASONRY WALL ISOLATION PAD



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION