


REV.	DESCRIPTION	DATE	BY

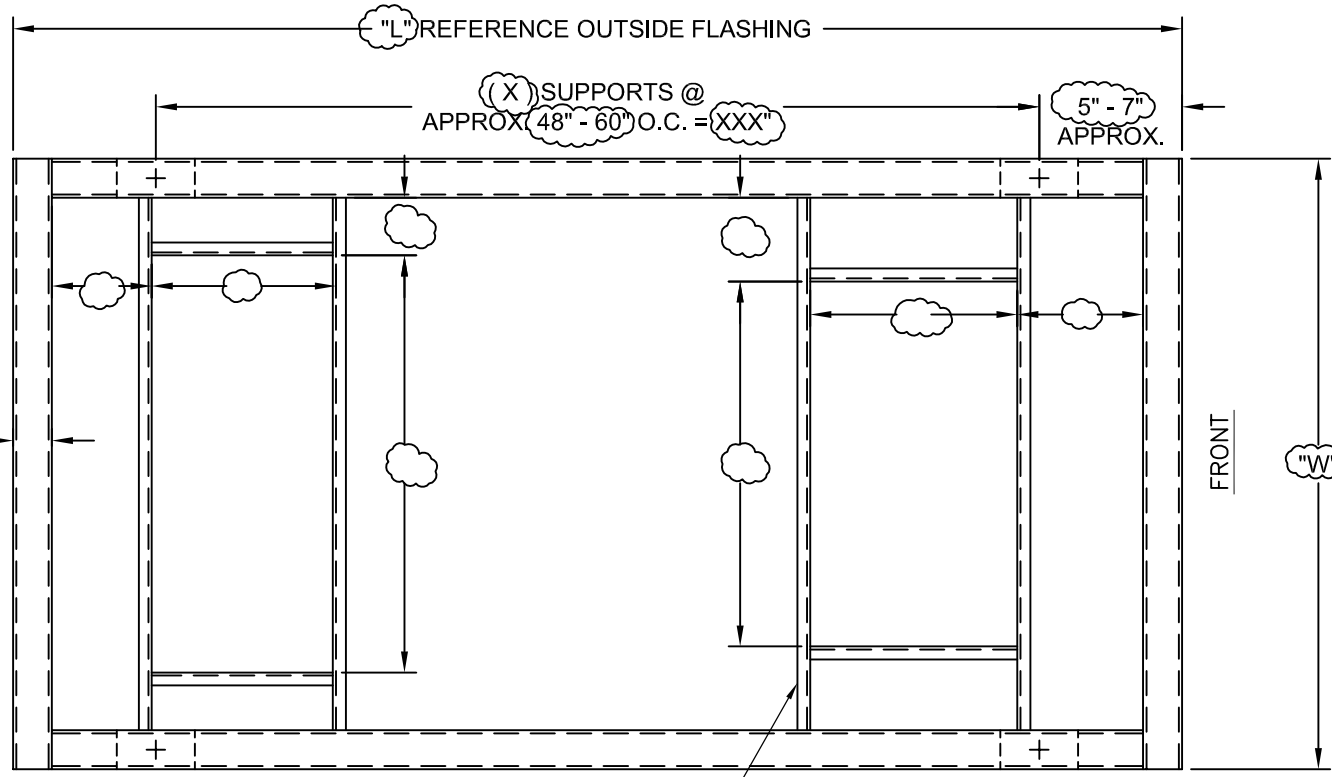

CURB DATA

TOTAL CURB WEIGHT: 9 LB/FT

QUANTITY: 1 SHIPPED IN 1 SECTION(S)

LOWER RAIL O.A. DIMENSIONS: L x W

CURB HT: 14" COND. RAIL HT: -

CURB LINEAL FOOTAGE: (Lx2)+(Wx2)

2" TYP.

FRONT

"W"

TYP. DUCT SUPPORTS AS REQUIRED
 FLUSH TO TOP; DROP "Y" INCHES

OPTIONS

YES NO

SEISMIC/WIND CONSIDERATION

SOUND BARRIER PKG.

CONDENSING UNIT RAIL PER DWG.

DUCT SUPPORT PKG.

TAG: _____

MANUFACTURER: _____

MODEL NUMBER: _____

OPERATING WEIGHT: _____

NOTE: ENGINEER REQUIRED TO FILL IN ALL VARIABLES PRIOR TO SUBMISSION. IF ANY VARIABLES ARE MISSING, MARK DWG AS "PRELIMINARY" AND SUBMIT. REMOVE BALLOONS AND THIS NOTE.

- NOTES:
1. ROOFING AND INSULATION TO BE SUPPLIED AND INSTALLED BY OTHERS.
 2. OUTSIDE DIMENSIONS OF CURB MATCH UNIT MANUFACTURERS CURB.
 3. FOR MANUFACTURING DETAILS, REFERENCE SUBSEQUENT DRAWING SHEETS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL P-6000 NON-ISOLATED SEISMIC WIND RESTRAINT ROOF CURB

THE VMC GROUP
 The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:	NONE	
SHEET:		
DRAWING NO.:	VMA -	REVISION