


211R-103524 REV.: 1 REV. DESCRIPTION DATE BY CONTINUOUS FLASHING ANGLE 2 x 1 1/2 x 20GA GALV. EQUIPMENT TO BE WELDED TYP. ALL AROUND TO RAIL PER CALCULATIONS VINYL TUBE CAP GRADE PLYWOOD TYP. 2 PLCS TYP. NEAR SIDE AND FAR SIDE GALVANIZED TS 3 X 4 X 11 GA (.120) (SEE NOTE 1 FOR DETAILS) GALVANIZED UPPER TUBE MEMBER 20 WATERPROOF MEMBRANE (BY OTHERS) OPTIONAL CANT STRIP (BY OTHERS) LOWER TUBE MEMBER ROOF INSULATION TS 3 X 4 X 11 GA (BY OTHERS) TS 4 x 4 x 1/4 - 6" LG MAX. ROOF DECK SEISMIC LEVELING CONNECTION AT EACH POCKET LOCATION. (SUPPLIED & INSTALLED BY OTHERS) NOTE 1: ONE (1) PLYWOOD FASCIA TO HAVE CUT-OUTS MATCHING SPRING POCKET LOCATIONS. THE REMAINING FASCIA TO BE WITHOUT CUTOUTS. OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE. **CERTIFIED FOR:** NONE JOB NAME: _ SHEET: MODEL R7300 ISOLATED SEISMIC WIND CUSTOMER: RESTRAINT RAIL STEEL ATTACH DETAIL THE VMC GROUP DRAWING NO. REVISION CUSTOMER P.O.: The Power of Together Bloomingdale, NJ 07403 SALES ORDER: Houston, TX 77041

211R-103524 REV.: 1 REV. DESCRIPTION DATE BY

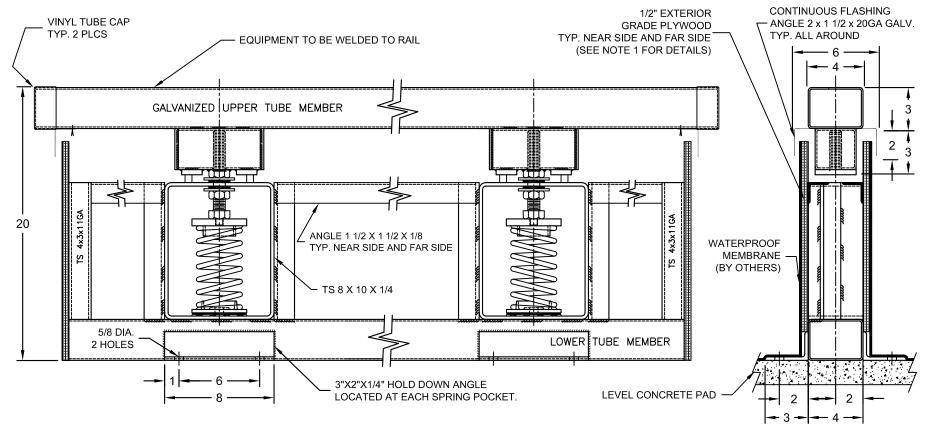

NOTE 1: ONE (1) PLYWOOD FASCIA TO HAVE CUT-OUTS MATCHING SPRING POCKET LOCATIONS. THE REMAINING FASCIA TO BE WITHOUT CUTOUTS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:			SCALE : NONE		
JOB NAME:	MODEL R7300 ISOLATED SEISMIC WIND		SHEET:	% e m ℓ	
CUSTOMER:	RESTRAINT RAIL CONCRETE ATTACH				
CUSTOMER P.O.:	DETAIL	THE VMC GROUP The Power of Together	DRAWING NO.:		REVISION
SALES ORDER:		Bloomingdale, NJ 07403 Houston, TX 77041			