


REV.	DESCRIPTION	DATE	BY

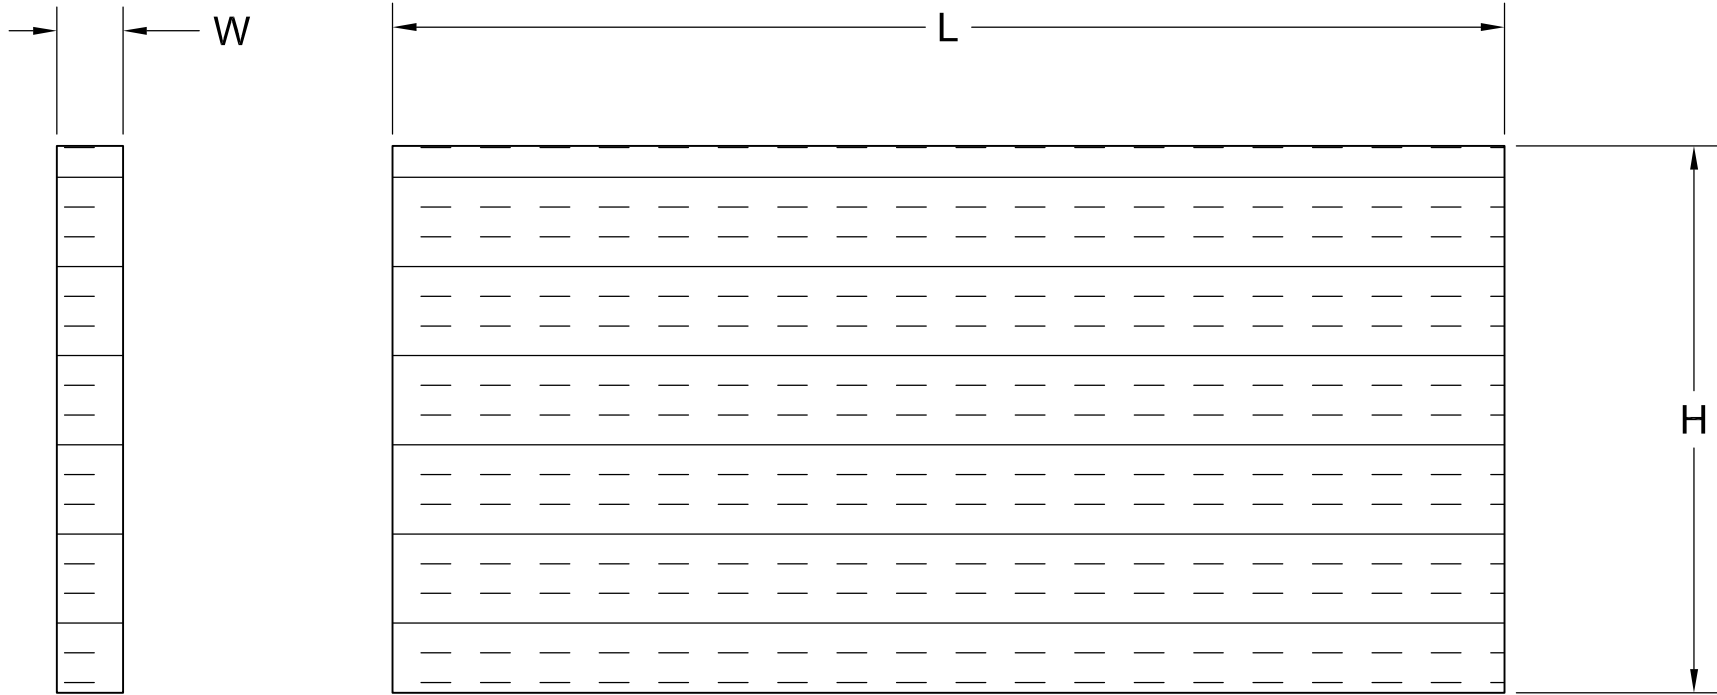


H	W	L
4-6 inches	0.50	VARIES
4-6 inches	0.75	
4-6 inches	1.00	

NOTES:

1. USED TO REDUCE THE PASSAGE OF FLANKING NOISE AND VIBRATION.
2. SUPERIOR CUSHIONING MATERIAL.
3. WEATHER RESISTANT, CHEMICAL, AND SOLVENT.
4. CUSTOM CUT LENGTH AVAILABLE, CONTACT VMC FOR AVAILABILITY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

<p>CERTIFIED FOR:</p> <p>JOB NAME: _____</p> <p>CUSTOMER : _____</p> <p>CUSTOMER P.O.: _____</p> <p>SALES ORDER: _____</p>	<p>MODEL SCE CLOSED CELL NEOPRENE SPONGE</p>	 <p>THE VMC GROUP <i>The Power of Together</i> Bloomingdale, NJ 07403 Houston, TX 77041</p>	<p>SCALE : NONE</p> <p>SHEET: _____</p> <p>DRAWING NO.: _____</p>	<p>Member VISCMA</p> <p>REVISION _____</p>
---	---	--	---	---