


REV.	DESCRIPTION	DATE	BY

MODEL #	NOMINAL DIMENSIONS			LOAD MODE	SHOCK AVERAGE K lbs./in.	VIBRATION AVERAGE K lbs./in.	RATED DYNAMIC TRAVEL in.
	H	W1 (REF)	W2 (REF)				
JSQ4-090-T2	0.90	1.25	1.65	Compression	75	120	0.35
				Shear	50	55	0.35
				45 deg. C/R	50	80	0.50
JSQ4-100-T2	1.00	1.35	1.80	Compression	45	70	0.45
				Shear	30	30	0.45
				45 deg. C/R	30	50	0.60
JSQ4-110-T2	1.10	1.50	1.95	Compression	30	45	0.55
				Shear	20	20	0.55
				45 deg. C/R	20	35	0.75

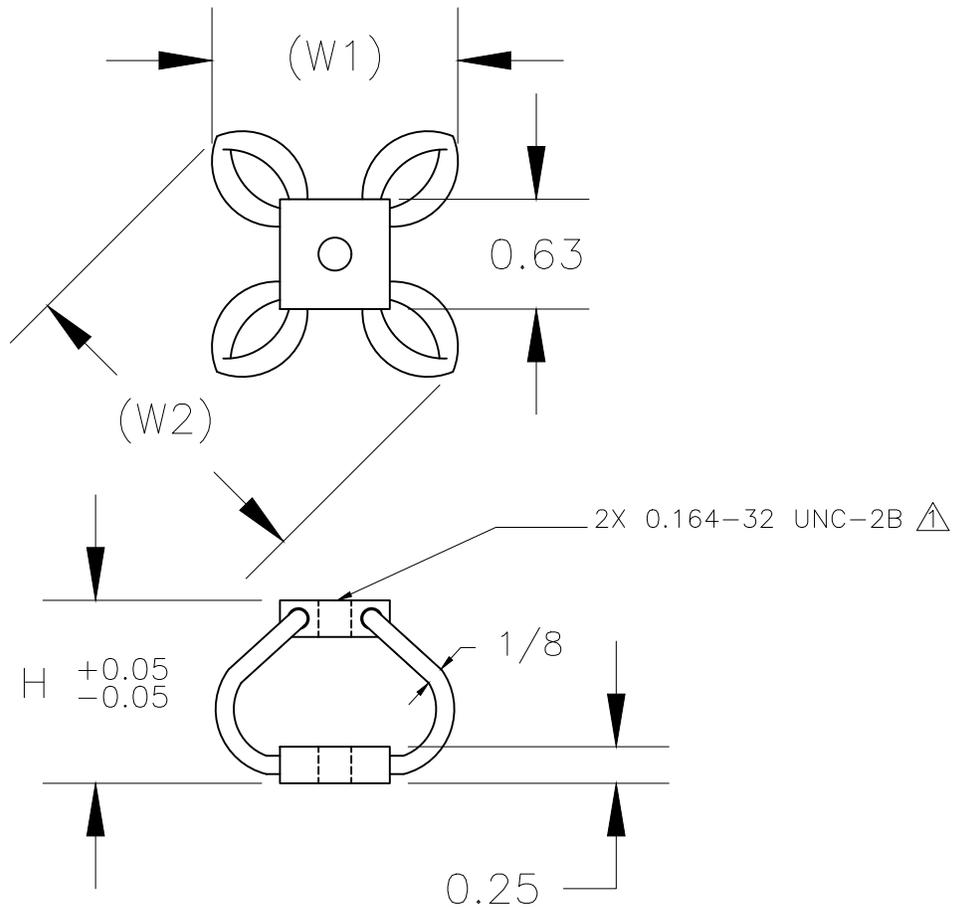

NOTES

△ SUFFIX -TM2= METRIC M4 x 0.7 TAPPING

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL JSQ4 SERIES
 SQUARE WIRE ROPE
 ISOLATOR**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE: NONE	
SHEET:	
DRAWING NO.:	REVISION