
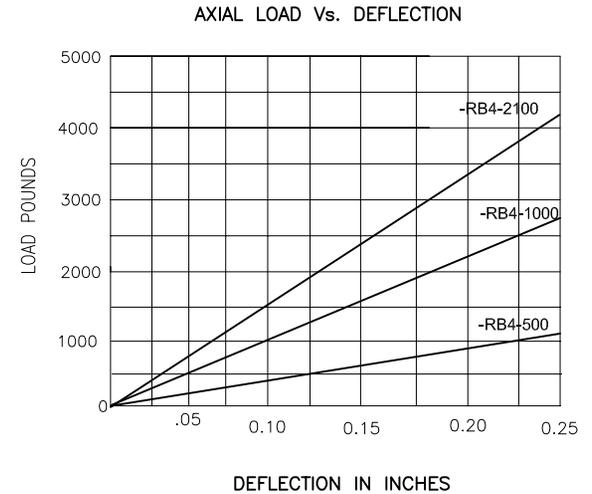


REV.	DESCRIPTION	DATE	BY

PART NO.	MODEL NO.	AXIAL STATIC LOAD MAX LBS.	RADIAL STATIC LOAD MAX LBS.	DUROMETER ± 5	COLOR CODE	MATERIAL
770008-1	RB4-500	500	200	40	RED	BR BRG NEO
770008-2	RB4-1000	1000	400	60	GREEN	BR BRG NEO
770008-3	RB4-2100	2100	900	70	YELLOW	BR BRG NEO
790008-4	RB4-NR55	△	△	55	ORANGE	NATURAL RUB

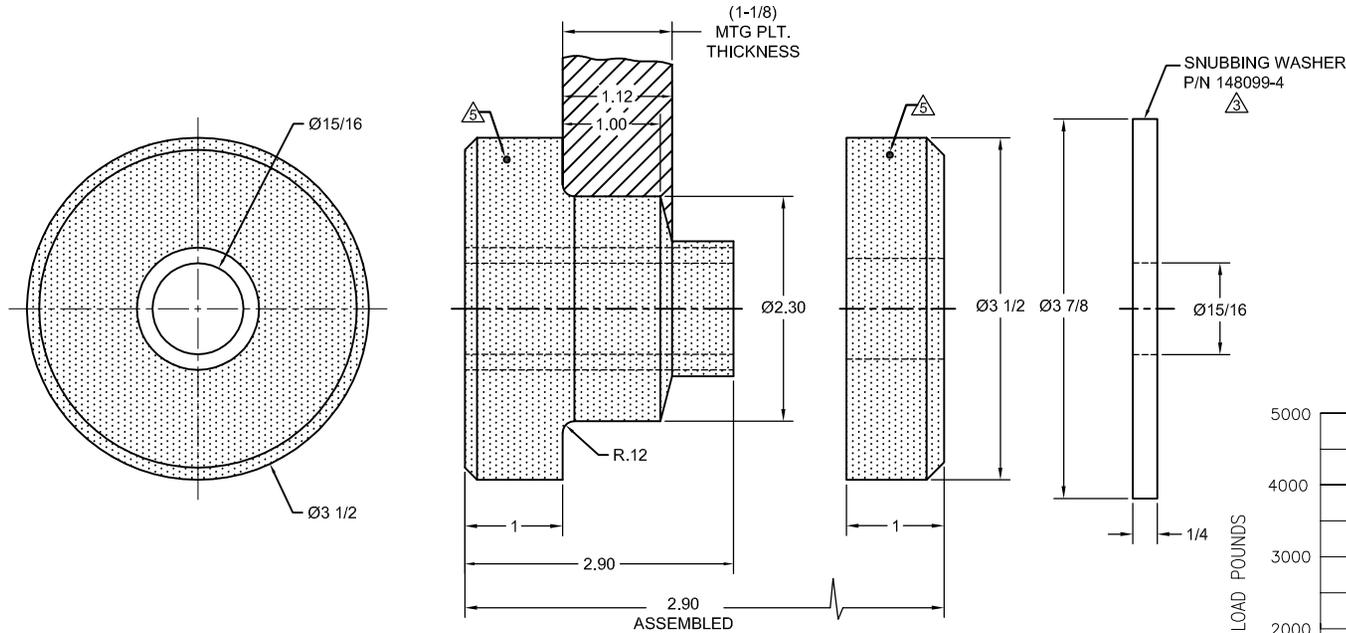

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
 2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 3. SNUBBING WASHER IS OPTIONAL, ORDER SEPERATE ON PURCHASE ORDER.
FINISH :YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED .
 4. COLOR-CODE "MARK "IS AN ACCEPTABLE ADDITION TO MODEL STAMPING .
 5. STAMPING SURFACE LOCATION AS MARKED ON DRAWING.
 6. CURRENTLY UNDER ENGINEERING REVIEW CONTACT VMC FOR AVAILABILITY
 7. 15/16" HOLE FOR 7/8" BOLT

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL RB4 500-2100 LBS.
 RING AND BUSHING
 ELASTOMERIC ISOLATOR**



THE VMC GROUP
 The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE :

NONE

SHEET:

1 OF 1



DRAWING NO.:

REVISION