





110R-103491 REV.: 2

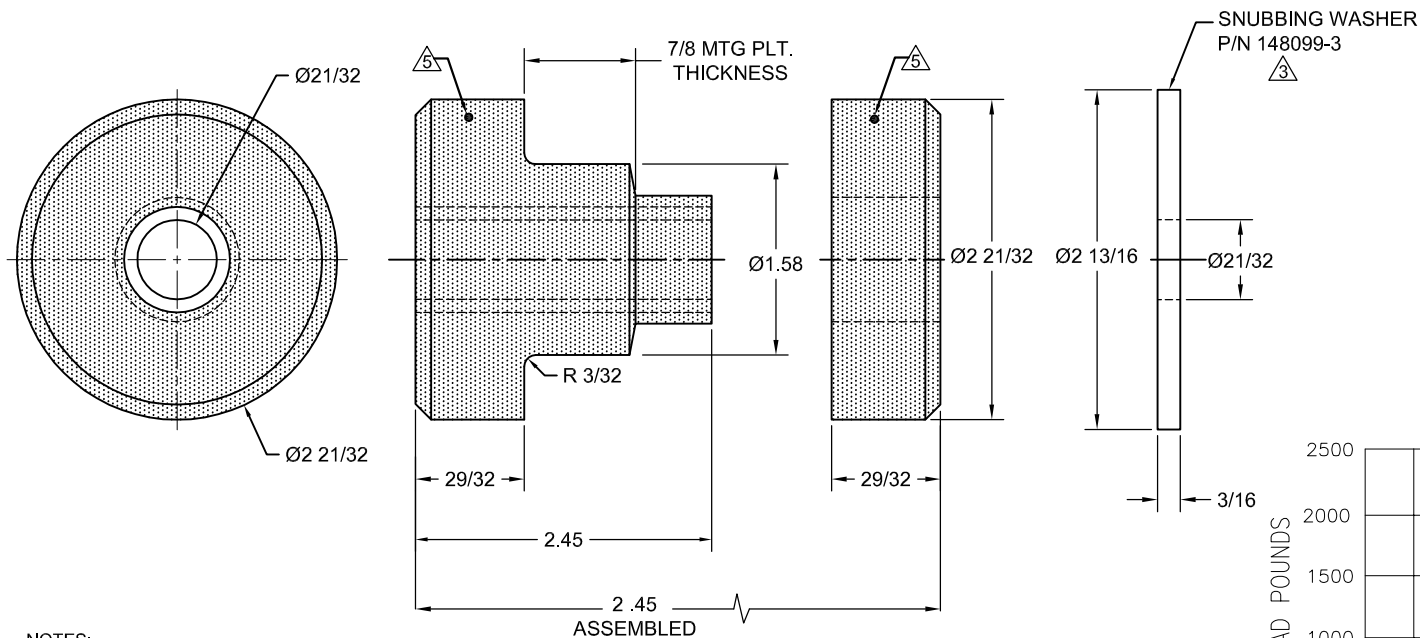
REV.

DESCRIPTION




DATE

BY

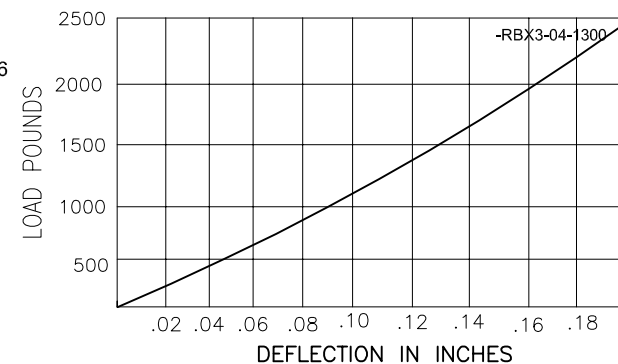
PART NO.	MODEL NO.	AXIAL STATIC LOAD MAX LBS.	RADIAL STATIC LOAD MAX LBS.	DUROMETER ± 5	COLOR CODE	MATERIAL
770045-1	RBX3-01			60	BLUE	BR BRG NEO
770045-2	RBX3-02			56	RED	POLYBUTADIENE
770045-3	RBX3-03			30	WHITE	BR BRG NEO
770045-4	RBX3-04	1300	650	70	PURPLE&WHITE	BR BRG NEO
770045-5	RBX3-05			60	RED/BLUE	BR BRG NEO
770045-6	RBX3-06			43	RED/YELLOW	NITRILE
770045-7	RBX3-07	1300	650	70	BLUE/YELLOW	NITRILE



NOTES:

- ALL DIMENSIONS ARE IN INCHES .INTERPRET PER ANSI Y14
- ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
- SNUBBING WASHER IS OPTIONAL, ORDER SEPERATE ON PURCHASE ORDER.
- FINISH :YELLOW ZINC PLATED PER ASTM B633 TYPE II, CLASS SC 3 UNLESS OTHERWISE SPECIFIED .
-  COLOR-CODE "MARK "IS AN ACCEPTABLE ADDITION TO MODEL STAMPING .
-  STAMPING SURFACE LOCATION AS MARKED ON DRAWING.
-  CURRENTLY UNDER ENGINEERING REVIEW CONTACT VMC FOR AVAILABILITY

AXIAL LOAD Vs. DEFLECTION



OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

MODEL RBX3 1300 LBS. RING AND BUSHING ELASTOMERIC ISOLATOR



THE VMC GROUP
The Power of Together
Bloomington, NJ 07403
Houston, TX 77041

SCALE :

NONE

SHEET:

DRAWING NO.:

REVISION

Member
VISCMA