

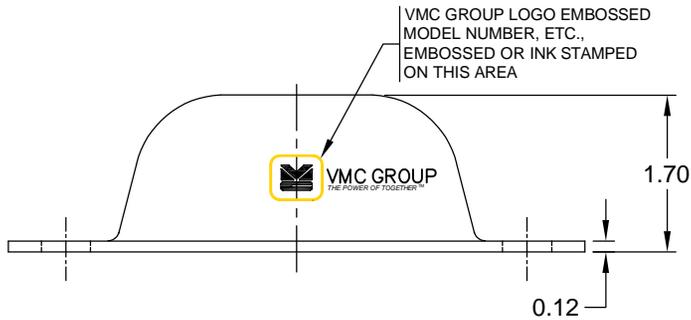


REV.	DESCRIPTION	DATE	BY

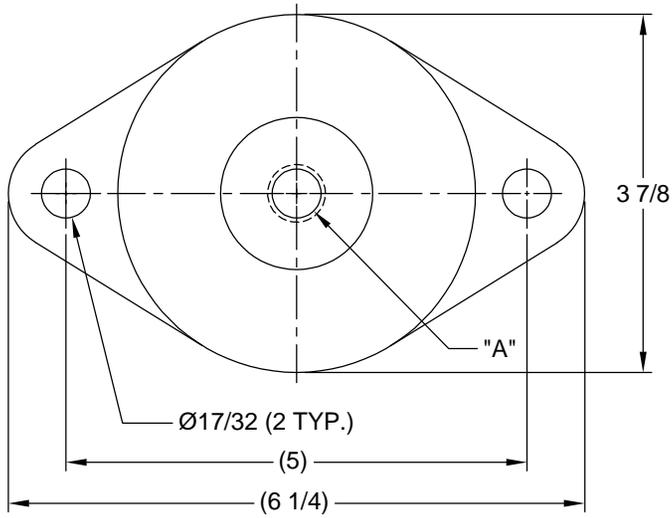

AXIAL LOAD VS. DEFLECTION

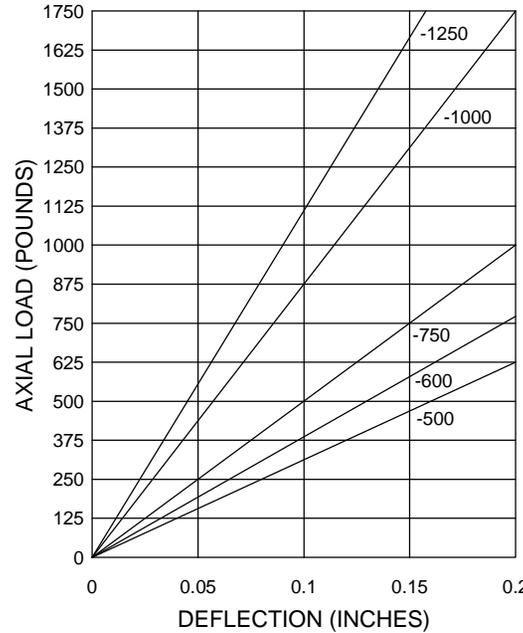


NEOPRENE			
PART NUMBER/ MODEL DESIGNATION	MAX. COMPRESSION LBS (KG)	MOUNT COLOR CODE	SHORE A DURO ± 5
TTBX-12-500	500 (227)	BLUE/WHITE	30
TTBX-12-600	600 (272)	BROWN/WHITE	40
TTBX-12-750	750 (340)	RED/WHITE	50
TTBX-12-1000	1000 (454)	GREEN/WHITE	60
TTBX-12-1250	1250 (567)	GRAY/WHITE	70

FOR SUFFIX DESIGNATION SEE TABLE II

TABLE II

SUFFIX DESIGNATION	DIMENSION "A"
12	3/4-10UNC-2B

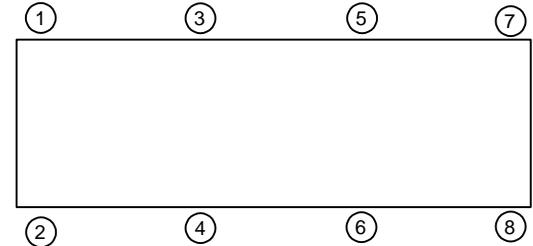

- NOTES:
- ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14.
 - ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
 - COLOR-CODE "DOTS" ARE AN ACCEPTABLE ADDITION TO MODEL STAMPING.
 - MOLDED METAL AND ELASTOMER MOUNT, DESIGNED FOR "FAIL-SAFE", "CAPTIVE", "MOBILE" OR "SEISMIC" APPLICATIONS. CONSULT VMC GROUP FOR SPECIFIC APPLICABILITY AND LIMITS.

ISOLATOR SELECTIONS	
LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL TTBX-12-500 THRU -1250 LBS.
 HIGH-STRENGTH, NEOPRENE
 CAPTIVE ELASTOMERIC ISOLATOR**



SCALE: NONE
 SHEET: _____
 DRAWING NO.: _____
 REVISION: _____

