


REV.	DESCRIPTION	DATE	BY

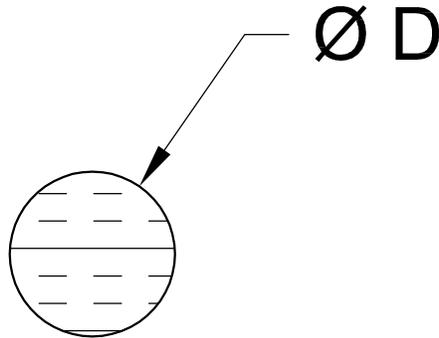

DIA.	LENGTH
1/2	VARIES
3/4	
1	

**NOTE;**

1. USED AS A BACKING AND THICKNESS CONTROL FOR ELASTOMERIC AND OTHER COLD APPLIED SEALANTS.
2. ALWAYS USE THE CORRECT SIZE BACKER ROD FOR THE PARTICULAR APPLICATION. REFER TO SIZE SELECTION AND JOB PROJECT REQUIREMENT.
3. CUSTOM CUT LENGTH AVAILABLE, CONTACT VMC FOR AVAILABILITY.
4. ALSO AVAILABLE IN 50-100FT ROLLS, CONTACT VMC FOR AVAILABILITY.
5. RECOMMENDED USAGE OF TREMCO TYPE; NON HARDEN MASTIC SEALANT AS REQUIRED PER JOB/PROJECT. CONTACT VMC AVAILABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER : \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL BACKER ROD  
 CLOSED CELL WITH SEALANT**



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE :  
**NONE**

SHEET:



DRAWING NO.:

REVISION