


REV.	DESCRIPTION	DATE	BY

MODEL #	NOMINAL DIMENSIONS			LOAD MODE	SHOCK	VIBRATION	RATED
	H	W1(REF)	W2(REF)		AVERAGE	AVERAGE	DYNAMIC
					Klbs./in.	Klbs./in.	TRAVEL in.
JSQ5-100-T2	1.00	1.50	2.20	Compression	145	205	0.45
				Shear	90	100	0.45
				45 deg. C/R	85	150	0.60
JSQ5-120-T2	1.20	1.70	2.40	Compression	65	105	0.65
				Shear	35	45	0.65
				45 deg. C/R	40	75	0.90
JSQ5-145-T2	1.45	2.00	2.60	Compression	30	55	0.90
				Shear	15	20	0.90
				45 deg. C/R	20	30	1.25

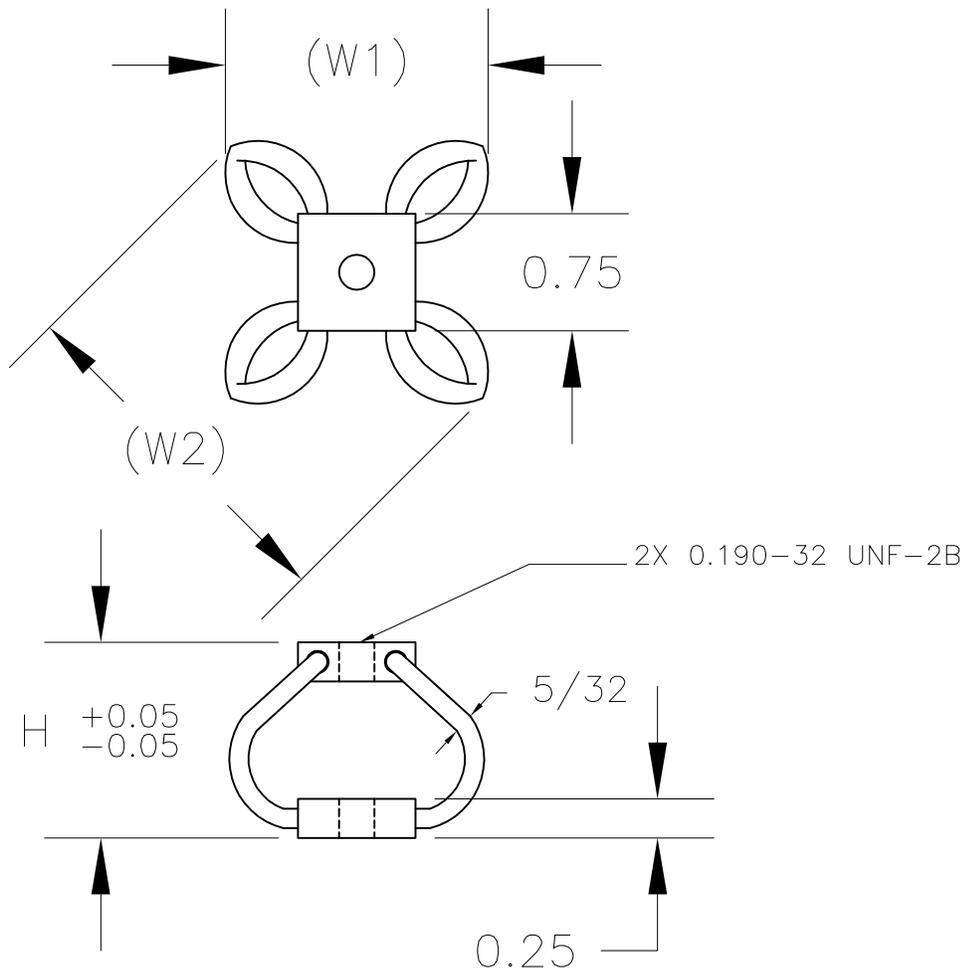

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL JSQ5 SERIES
 SQUARE WIRE ROPE
 ISOLATOR**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION