





225R-103879 REV: 1

REV.	DESCRIPTION	DATE	BY

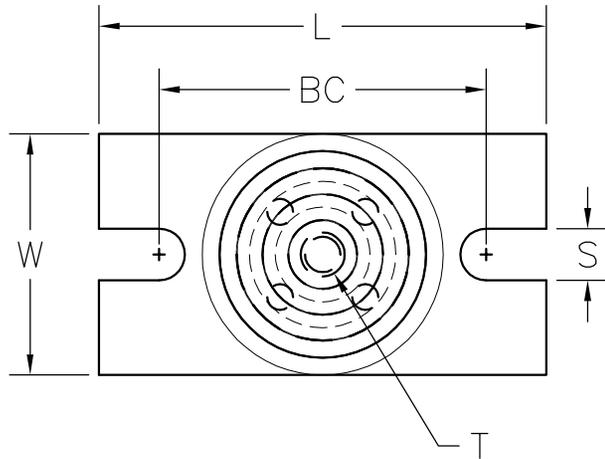

MODEL	LOAD CAPACITY (POUNDS)	RATED DEFLECTION (INCHES)	COLOR	DUROMETER
NCM1Y	45-75	0.35	YELLOW	35
NCM1G	80-125	0.35	GREEN	40
NCM1R	115-180	0.35	RED	50
NCM1W	160-230	0.35	WHITE	60
NCM1S	225-300	0.35	SILVER	60

SIZE	L	W	H	MD	BC	S	T
NCM1	3 1/4	1 3/4	1 5/8	1 1/2	2 3/8	3/8	5/16-18UNC
NCM2	3 7/8	2 3/8	1 5/8	1 7/8	3	3/8	3/8-16UNC
NCM3	5 5/8	3 3/8	2 3/8	2 5/8	4 1/8	5/8	1/2-13UNC
NCM4	6	3 5/8	2 3/8	3	4 1/2	5/8	1/2-13UNC

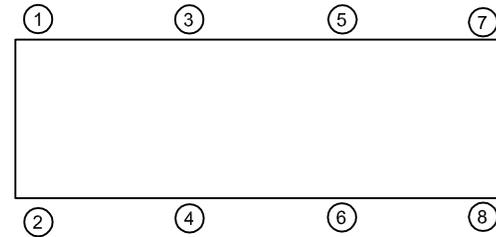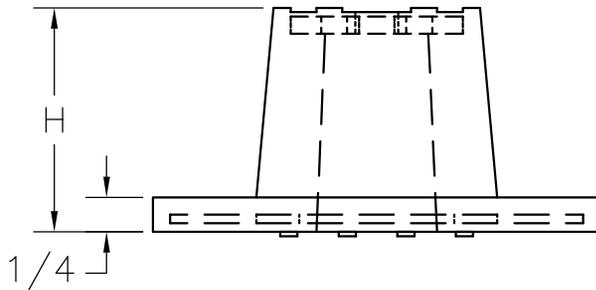

**ISOLATOR SELECTIONS**

LOC 1:	LOC 2:
LOC 3:	LOC 4:
LOC 5:	LOC 6:
LOC 7:	LOC 8:
CUSTOMER EQP'T. TAG:	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.
2. MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, FOR SERVICE CONDITIONS.
3. CONSULT VMC FOR APPLICABILITY.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER : \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL NCM 45-300 LBS.  
 ELASTOMERIC ISOLATOR  
 0.35 DEFLECTION**



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE :

NONE

SHEET:



DRAWING NO.:

REVISION