

135R-101289 REV.: 4 REV. DESCRIPTION DATE BY

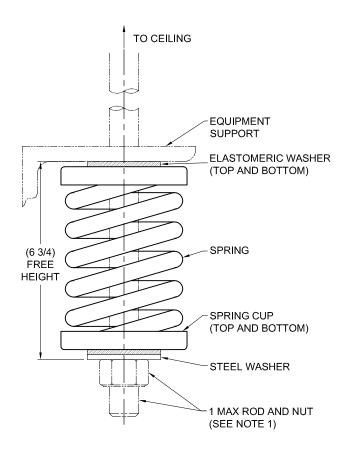

TYPE HSO-3C SPRING HANGERS FOR 3" NOMINAL DEFLECTION								
HANGER	RATED LOAD (LBS)	DEFLECTION (IN)	SPRING RATE (LB/IN)	SPRING COLOR CODE				
HSO-3C-75	75	3.00	25	WHITE				
HSO-3C-145	145	2.90	50	LT PURPLE				
HSO-3C-215	215	2.59	83	LT BROWN				
HSO-3C-315	315	2.37	133	ORANGE				
HSO-3C-470	470	2.35	200	DK BROWN				
HSO-3C-600	600	2.25	267	DK PURPLE				
HSO-3C-860N <sup>1</sup>	860	2.25	383	ORANGE/RED				
HSO-3C-1055N <sup>1</sup>	1055	2.34	450	DK BROWN/RED				
HSO-3C-1165N <sup>1</sup>	1165	2.25	517	DK PURPLE/RED				

## NOTES:

1. TWO NESTED SPRINGS YIELD THIS LOAD. THE COLOR CODE INDICATED IS FOR OUTER SPRING/ INNER SPRING.



ISOLATOR SELECTIONS				
LOC 1:	LOC 2:			
LOC 3:	LOC 4:			
LOC 5:	LOC 6:			
LOC 7:	LOC 8:			
CUSTOMER EQP'T. TAG:	•			

NOTE: MATERIAL SHOWN IS FOR (1) SET.

## NOTES:

- 1. HANGER RODS AND NUTS, AS SHOWN, NOT BY THE VMC GROUP.
- 2. STANDARD FINISH SPRING POWDER COAT. HARDWARE: ZINC-ELECTROPLATE.
- 3. ALL DIMENSIONS IN INCHES. INTERPRET PER ANSI Y14.
- 4. ALL DIMENSIONS ARE FOR REFERENCE, DIMENSIONS SHOWN AS NOMINAL.
- 5. ALL SPRINGS ARE DESIGNED WITH MINIMUM 50% OVER-TRAVEL.
- 6. RATED DEFLECTIONS ARE WITHIN 25% OF NOMINAL. HIGHER DEFLECTIONS ARE ALLOWED IF THEY MEET SPECIFICATIONS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:			SCALE : NONE	_				
JOB NAME:	MODEL HSO-3C 75-1165 LBS.		SHEET:	Membe,				
CUSTOMER:	SPRING HANGERS			71541				
CUSTOMER P.O.:	3 INCH DEFLECTION	THE VMC GROUP The Power of Together	DRAWING NO.:	REV	ISION			
SALES ORDER:		Bloomingdale, NJ 07403 Houston, TX 77041						