

218R-103774 REV.: 1 REV. DESCRIPTION

	STANDA	STANDARD SHSC-1B HANGER ARRANGEMENT					
	MODEL DESIGNATION	MAX. LOAD (LBS.)	DEFL. (IN.)	SPRING (LBS.)	COLOR SPRING		
Ī	SHSC-1B-20	20	1.25	16	DK.BLUE		
	SHSC-1B-35	35	1.17	30	BLACK		
	SHSC-1B-50	50	1.11	45	RED		
	SHSC-1B-70	70	0.88	80	DK.GREEN		
Ī	SHSC-1B-85	85	0.81	105	GRAY		



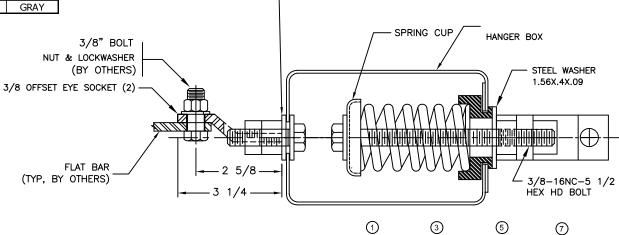

-3/8 STD STEEL WASHER

## 2 4 6 8

## NOTES:

CUSTOMER P.O.

SALES ORDER:

- 1. STANDARD FINISH: HANGER BOX; GALVANIZED STEEL, SPRING POWDER COAT.
- 2. ALL DIMENSIONS IN INCHES. INTERPRET PER ANSI Y14.
- 3. ALL DIMENSIONS ARE FOR REFERENCE, DIMENSIONS SHOWN AS NOMINAL.
- 4. ALL SPRINGS ARE DESIGNED WITH MINIMUM 50% OVER-TRAVEL.
- 5. HANGER BOXES ARE AVAILABLE PRE-COMPRESSED UP TO THEIR DESIGNATED MAX. LOAD. PERCENTAGE OF PRE-COMPRESSION TO BE DETERMINED BY ENGINEERED APPLICATION OR AS REQUESTED BY CUSTOMER. CONSULT FACTORY FOR POSSIBLE ADDITIONAL PARAMETERS AND OR LIMITATIONS.
- 6. SOME ASSEMBLIES MAY INCLUDE ADDITIONAL OR VARING SIZE WASHERS.

ISOLATOR S	ISOLATOR SELECTIONS			
LOC 1:	LOC 2:			
LOC 3:	LOC 4:			
LOC 5:	LOC 6:			
LOC 7:	LOC 8:			
CUSTOMER EQP'T. TAG:				

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

REVISION

DATE

BY

CERTIFIED FOR:				
JOB NAME:				
CUSTOMER:				

MODEL SHSC-1B 20-85 LBS.
LOW PROFILE SPRING ISOLATOR
WITH OFFSET EYELETS
1 INCH DEFLECTION

	NONE	w e
	SHEET:	``'` <del>`</del>
THE VMC GROUP	DRAWING NO.:	•
The Power of Together		
Bloomingdale, NJ 07403		
Houston TX 77041		